

Subject: [@SUBJECT]	Part No.: [@PART_NO]	Rev.: [@REV]
	Doc. No.: [@DOCU_NO]	
Project Code: [@PROJECT_CODE]		Page 1 of 5
Model Name: [@MODEL_NAME]		

1. Purpose

1.1 This functional specification defines the performance characteristics of 200W standard power.

2. Output Characteristics


MODEL		B225-001
OUTPUT	DC VOLTAGE	4.0V
	RATED CURRENT	50A
	OPERATION CURRENT	0~50A
	RATED POWER	200W
	RIPPLE & NOISE	150mVp-p
	OUTPUT VOLTAGE TOLERANCE	±3%
	LINE REGULATION	±0.5%
	LOAD REGULATION	±2%
	DYNAMIC LOAD	800mVp-p (1kHz)
	TRUN ON TIME AND RISE TIME	<1000ms,100ms@115Vac/230Vac at full load
	HOLD UP TIME	≥10ms/115Vac at full load
INPUT	VOLTAGE RANGE	90~305Vac
	OPERATION VOLTAGE	100~277Vac
	FREQUENCY RANGE	47~63Hz
	EFFICIENCY (Typ.)	87%
	AC CURRENT (Full Load)	3.0A/115Vac, 1.4A/230Vac
	INRUSH CURRENT	80A peak @230Vac, Cold start at full load
	POWER FACTOR	PF>0.98/115Vac, PF>0.95/230Vac
	THD	THD<15% @230Vac/50Hz at full load
	LEAKAGE CURRENT	< 0.75mA/277Vac
PROTECTION	SHORT, OPP	Protection type : Auto-Recovery
	OVER VOLTAGE	4.6~5.4V
		Protection type : Latch(Re-start)
	OVER CURRENT	70A~93A
	OVER TEMPERATURE	95°C ±10°C
Protection type : Auto-Recovery		
ENVIRONMENT	OPERATION TEMP.	-30 ~ 70°C (Refer to output load de-rating curve)

Subject: [@SUBJECT]	Part No.: [@PART_NO]	Rev.: [@REV]
	Doc. No.: [@DOCU_NO]	
Project Code: [@PROJECT_CODE]		Page 2 of 5
Model Name: [@MODEL_NAME]		

	WORKING HUMIDITY	10 ~ 95% RH non-condensing
	STORAGE TEMP., HUMIDITY	-40 ~ 85°C, 10~95% RH
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)
EMC	EMC CONDUCTION&RADIATION	Compliance to EN55022; EN55024 ;FCC_Part15B; CNS14336-1; EN61000
HI-POT	Dielectric Withstand Voltage	I/P-O/P: 3 KVAC, I/P-FG: 1.5KVAC
SURGE	-	4KV(L/N-FG) & 2KV(L-N)/1.2*50µsec
Insulation Resistance	-	I/P-O/P, I/P-FG, O/P-FG: >100MQ/500VDC/25°C/70%RH
OTHERS	MTBF	220Khrs min MIL-HDBK-217F(25°C)
	DIMENSION	210 *81*25mm (L*W*H)
NOTE	<p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple current is measured at 20MHz of bandwidth. The measured terminal is paralleled with a 47uF E-cap and a 0.1uF Ceramic cap.</p>	

Subject: [@SUBJECT]	Part No.: [@PART_NO]	Rev.: [@REV]
Project Code: [@PROJECT_CODE]	Doc. No.: [@DOCU_NO]	Page 3 of 5
Model Name: [@MODEL_NAME]		

3. Mechanical Drawing

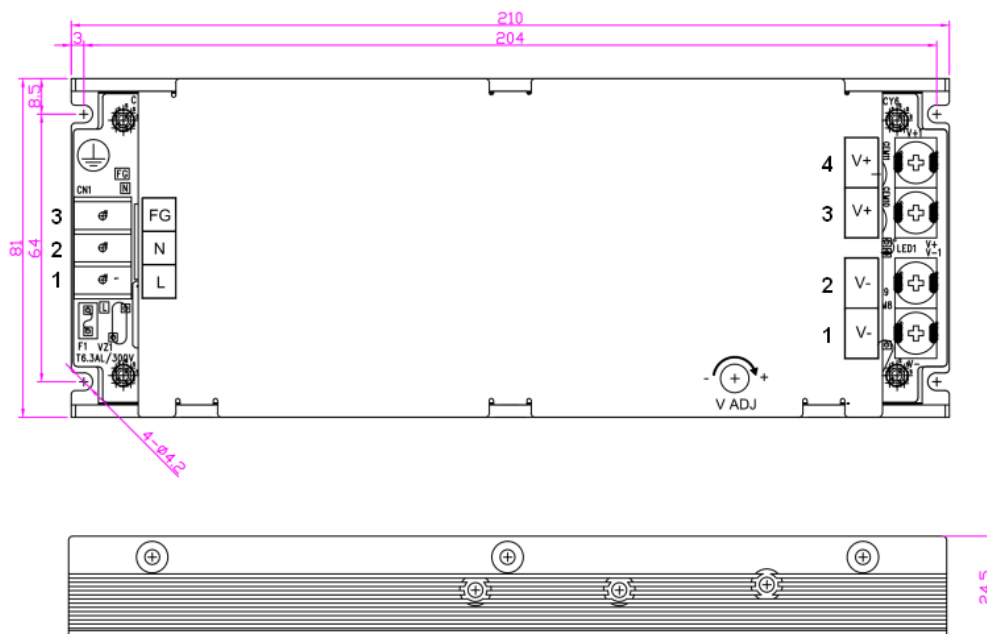


■ AC input connector (DT-25-B01W-03)

Pin No.	Symbol	Description
1	L	AC Input Line
2	N	AC Input Neutral
3	FG	Earth

■ DC output connector (PCB-50M5F)


Pin No.	Symbol	Description
1,2	V-	DC Ground
3,4	V+	DC Output

4. Function Block

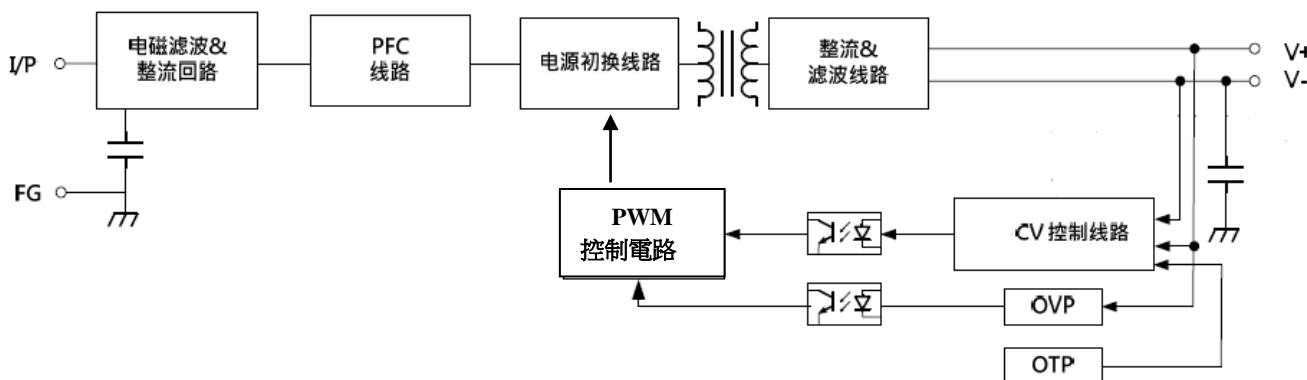


Subject: [@SUBJECT]	Part No.: [@PART_NO]	Rev.: [@REV]
	Doc. No.: [@DOCU_NO]	
Project Code: [@PROJECT_CODE]		Page 4 of 5
Model Name: [@MODEL_NAME]		

5. Output load de-rating curve

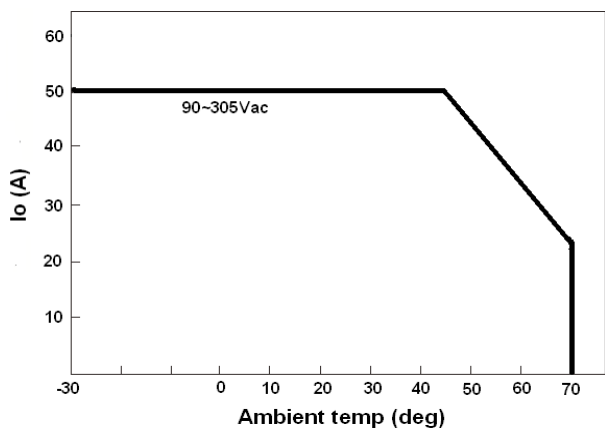

Ambient temperature vs. Output Load

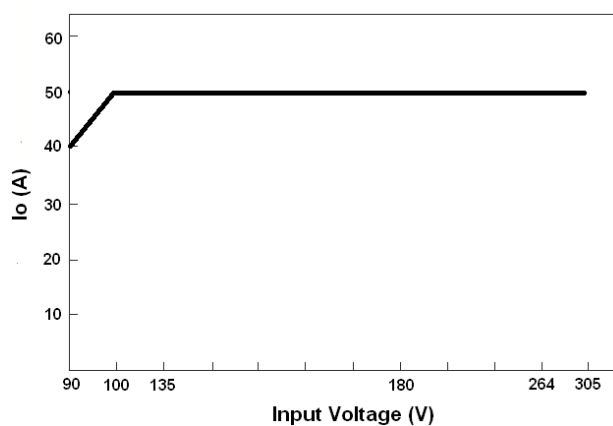


Input Voltage vs. Output Load

6. Installation Diagram

6.1 外加鋁板.

為符合”Output load de-rating curve”，電源需安裝在一片鋁板上(或相同尺寸的機殼)，建議鋁板尺寸如下圖所示

※為使電源與鋁板緊密結合，鋁板需為光滑表面或於接觸面塗散熱油以優化電源溫度性能

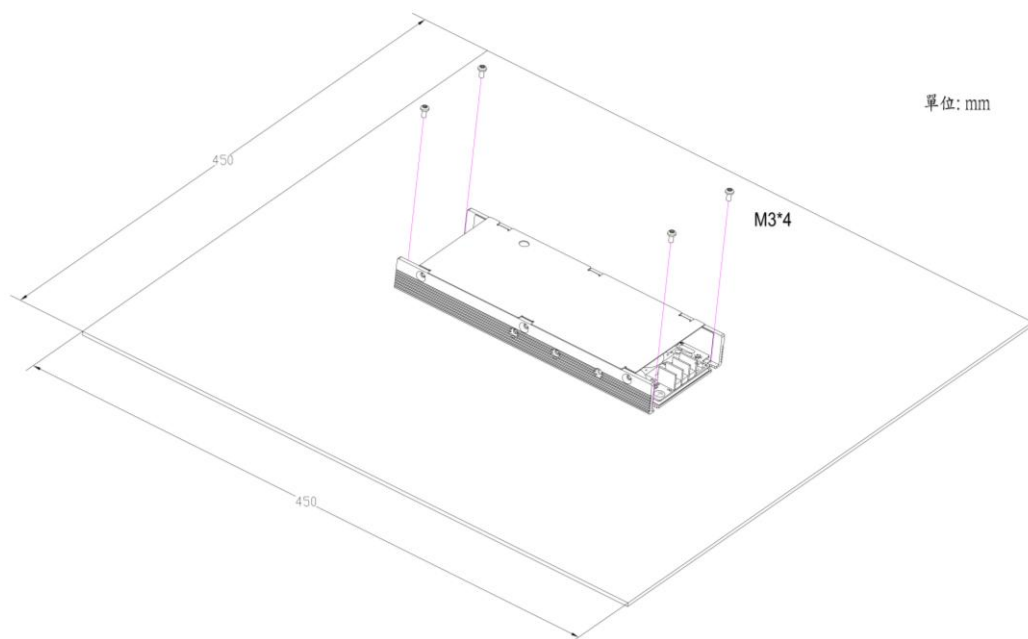

Subject: [@SUBJECT]	Part No.: [@PART_NO]	Rev.: [@REV]
	Doc. No.: [@DOCU_NO]	
Project Code: [@PROJECT_CODE]		Page 5 of 5
Model Name: [@MODEL_NAME]		

6.2 為保證電源散熱良好，電源週圍需留至少 5cm 空間

