

Features

- Built-in 10KV lightning surge protection (EN61000-4-5)
- 90 ~ 305Vac full range input; Active PFC
- Output voltage range up to 200Vdc for outdoor lighting
- Aluminum case IP65/ IP67 waterproof
- Dual mode over temperature thermal design
- Output voltage automatic tracing & fixing function
- Built-in 3 in 1 output current dimming function (Type B)
- Optional timer dimming function (contact Darfon)
- Class 2 power unit / Pass LPS ; Long lasting life time
- All Series approved to UL/CB/CCC/CE/PSE
- Outdoor LED luminaries rugged driver solutions
- 5 years warranty



MDC-060-XXXX □ Type A: IP65 grade · Output current adjustable by internal variable resistor
Type B: IP67 grade · Output current dimming by 0~10V/10V PWM signal/Resistor

Model	Rated Output Current	Output Current Adj. Range(1)	Output Voltage Range	Output Voltage @ No Load (2)	OVP level	Rated Output Power	Efficiency(3)
MDC-060-0350	350mA	210~350mA	100~200V	213V	248~280V	70W	91%
MDC-060-0700	700mA	420~700mA	50~100V	104V	118~140V	70W	91%
MDC-060-1050	1050mA	630~1050mA	35~70V	74V	94~115V	70W	91%
MDC-060-1400	1400mA	840~1400mA	25~49V	52V	54~70V	68W	90%
MDC-060-1750	1750mA	1050~1750mA	18~35V	42V	43~55V	60W	90%
MDC-060-2280	2280mA	1400~2280mA	14~27V	32V	30~40V	60W	89.5%

1. For Type A only
2. Please refer to " LED Driving Output Mode " chart
3. Efficiency test condition please refer to " Efficiency v.s. Load " chart

◆ Input Specification

Input Voltage Range (1)	90 ~ 305VAC
Input Frequency	47 ~ 63Hz
Power Factor (2) (Typ.)	PF>0.98 / 115VAC, PF>0.96 / 230VAC, PF>0.94 / 264VAC, @ full load
Total Harmonic Distortion	THD<20% @230VAC / 50Hz, @ full load
Input Current (Typ.)	0.75A / 115VAC, 0.4A / 230VAC, 0.35A / 277VAC

Inrush Current (Typ.)	60A peak @ 230VAC, Cold Start
Leakage Current	< 0.75mA / 277VAC

1. Please refer to "Input Voltage v.s. De-Rating Curve" chart
2. Please refer to "PFC v.s. Load Curve" chart

◆ Output Specification

Output Current Tolerance	± 5%
Ripple & Noise (1)	MDC-060-0350 0.5V p-p ; MDC-060-0700/1050/1400/1750/2280 0.2V p-p
Output Ripple Current	± 5%
Line Regulation	± 1%
Turn-on Time	< 1.5S @ 115VAC , 0.5S @ 230VAC , @ full load
Hold up Time	> 12ms / 115VAC , @ full load

1. Ripple current is measured at 20MHz of bandwidth. The measured terminal is paralleled with a 22uF E-cap and a 0.1uF Ceramic cap.

◆ General Specification

MTBF	350Khrs min. MIL-HDBK-217F(25°C)
Life Time	> 50,000hrs , 230VAC , 100% Load , @ T-Case 70°C
Dimension	170 * 63 * 40mm (L*W*H)
Weight	730g

◆ Protections

Short Circuit	Auto recovery or Power reset
Over Voltage	Power reset
Over Temperature De-Rated (1)	Over 70°C , automatic de-rate to 75% of rated load current
Over Temperature (1)	85°C±10°C , Auto recovery

1. Please refer to "Temperature v.s. De-Rating Curve" chart.

◆ Environment, Safety and EMC


Operating Temperature & Humidity (1)	-40°C~70°C ; 10%~95% RH , Non-condensing
Storage Temperature & Humidity	-40°C~85°C ; 10%~95% RH
Vibration	IEC 68-2-2-1995/CNS-3629-C6016/GB/T 2423.10-2008 ; 5-500Hz , 1.0G , 1 Oct/min , 2cycle X, Y, Z, 75 minutes
Safety standards	UL 8750, EN 61347-1, EN 61347-2-13 , GB 19510.1 , GB 19510.14
EMI	EN 55015, EN 61000-3-2, EN 61000-3-3, FCC Part18, CNS 14115, GB 17743
EMS	EN 61547, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11, GB 17625.1
Lightning Surge	10KV(L/N-PE) & 5KV(L-N) /1.2*50µ sec

Hi-Pot	I/P-O/P: 3.75KVAC, I/P-PE: 2KVAC, O/P-PE: 0.5KVAC
Insulation Resistance	I/P-O/P, I/P-PE, O/P-PE: >100MΩ/500VDC/25°C/70%RH


1. Please refer to "Temperature v.s. De-Rating Curve" chart

◆ Mechanical Drawing


Type A

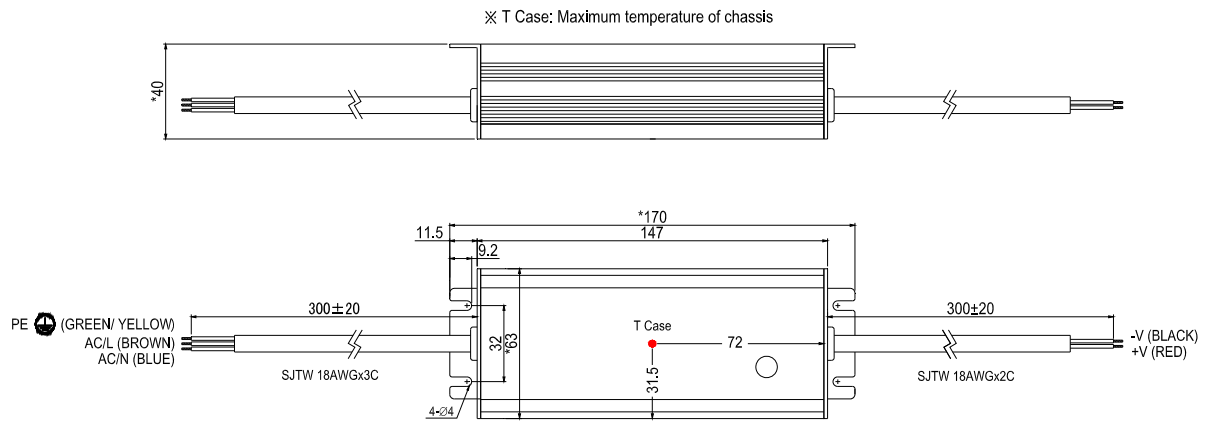

Type B

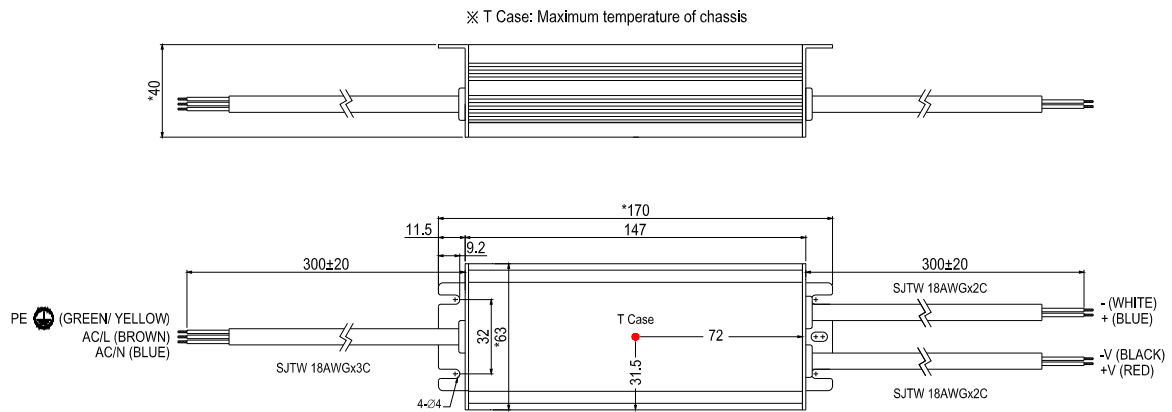

◆ Dimming Mode (Type B only)



* Do not put "-V (BLACK)" & "- (WHITE)" in connection

* Short ~ 100KΩ adjust output current (MDC0601750)

Resistor value	Short	10KΩ	20KΩ	30KΩ	40KΩ	50KΩ	60KΩ	70KΩ	80KΩ	90KΩ	100KΩ	OPEN
Rated Current rate	2.2%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95~105%


* 0 ~ 10Vdc adjust output current (MDC0601750)

Vdc	0V	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Rated Current rate	2.2%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95~105%

* 10 V PWM adjust output current ; Frequency range 100Hz~3KHz (MDC0601750)


Duty	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Rated Current rate	2.2%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95~105%

◆ Dimming Curve (MDC0601750)

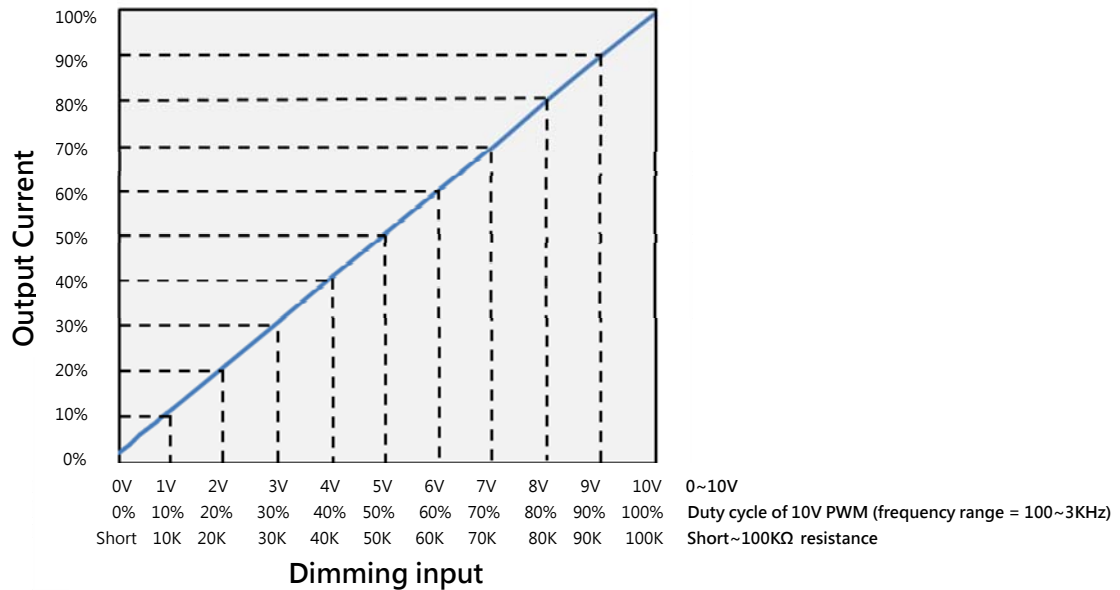

※ Note : 1. The output current drops down to 2.2% when the dimming input is short or 0Vdc.
2. 0V ~ 1V dimming application please consult Darfon.


◆ Function Block

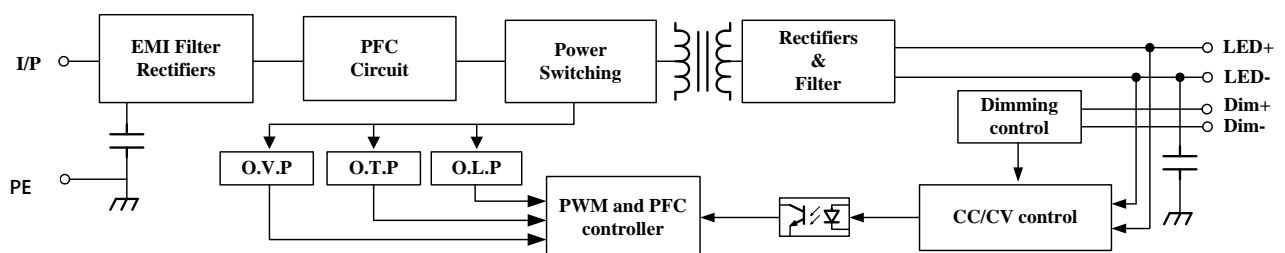


◆ LED Driving Output Mode

Darfon LED driver output characteristics with constant voltage mode (CV) & constant current mode (CC) to direct drive all kinds of LED lighting correctly

No load start up waveform:
Vout = Vno_Load (CV)

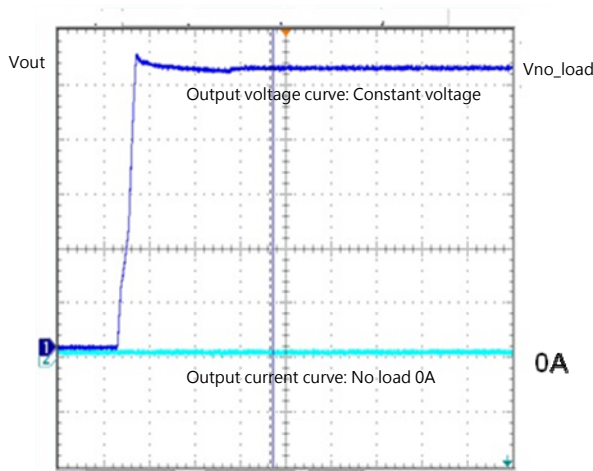


Connecting LED load start up waveform:
Vout = Vled ; Iout = Iset (CC)
(Iset = Default output current)

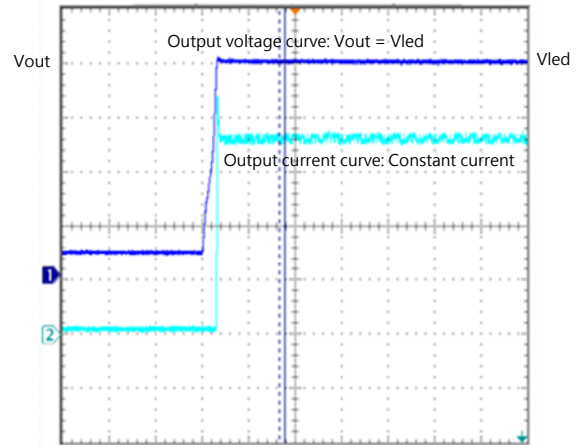


Welcome to consult Darfon to optimize your LED driving configuration!!

◆ Output Load De-Rating Curve


Temperature v.s. De-Rating Curve

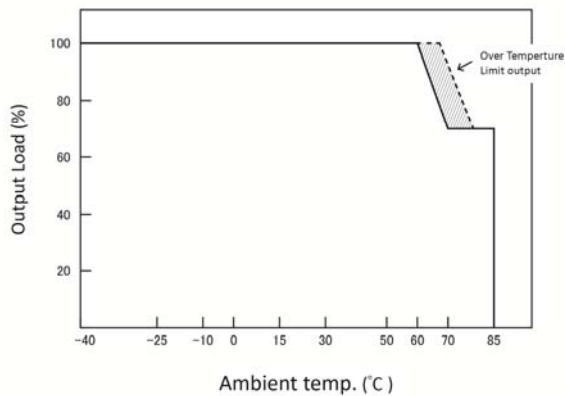

Input Voltage v.s. De-Rating Curve

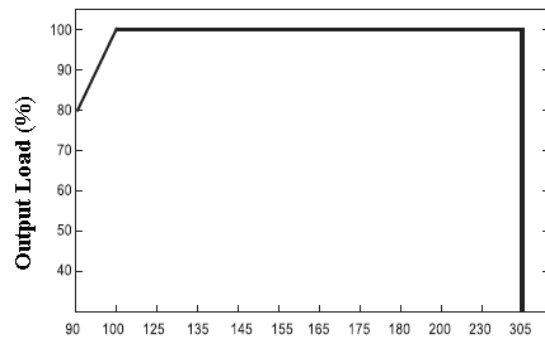

Efficiency v.s. Load (MDC-060-0700)

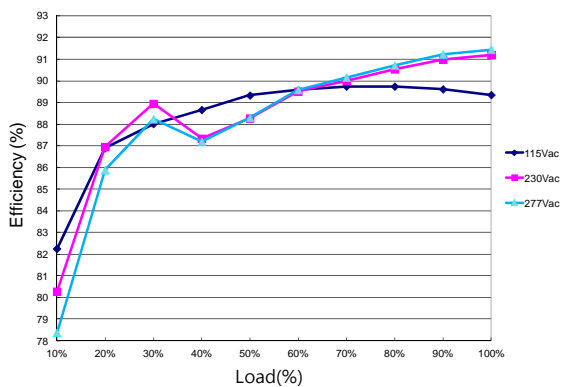

Power Factor v.s. Load (MDC-060-0700)

